

11-20-00

A

11/16/00



SILENT TECHNOLOGIES
Legal Department, 51U-PD
Intellectual Property Administration
P.O. Box 58043
Santa Clara, California 95052-8043

PATENT APPLICATION

ATTORNEY DOCKET NO. 10990361-2

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design

☒ original patent application,

☐ continuation-in-part application



INVENTOR(S): Hunter et al.

TITLE: Image Sensor Packaging with Imaging Optics

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☐ signed ☒ unsigned or partially signed
☒ 2 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☒ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	23 — 20	3	X \$18	\$ 54
INDEPENDENT CLAIMS	3 — 3	0	X \$80	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$270	\$ 0
BASIC FEE: Design (\$320.00); Utility (\$710.00)				\$ 710
TOTAL FILING FEE				\$ 764
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 764

Charge \$ 764 to Deposit Account 50-1078. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 50-1078 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 50-1078 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EK176611994US

Date of Deposit 11/16/2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Katherine Lopez Diangson
Typed Name: Katherine Lopez Diangson

Respectfully submitted,

Hunter et al.

By Pamela Lau Kee

Pamela Lau Kee

Attorney/Agent for Applicant(s)
Reg. No. 36,184

Date: 11/16/2000

Telephone No.: (408) 553-3059

Patent Application
for:

IMAGE SENSOR PACKAGING WITH IMAGING OPTICS

Attorney Docket No. 10990361-2

Inventors:	Andrew Hunter	Address:	96 Park Road, Stapleton, Bristol BS16 1AU, England
	James-Yu Chang	Address:	901 Cottonwood Drive Cupertino, California 95014
	Park-Kee Yu	Address:	3949 Hamilton Park Drive San Jose, California 95130
	Ray Schuder	Address:	1014 Middle Avenue #1 Menlo Park, California 94025

IMAGE SENSOR PACKAGING WITH IMAGING OPTICS

FIELD OF THE INVENTION

5

The invention relates generally to digital image capture systems, and more particularly to the packaging of image sensors in conjunction with imaging optics.

10 BACKGROUND OF THE INVENTION

Digital cameras, either still or video, utilize image sensors to capture digital image information. As with conventional film based cameras, digital cameras include imaging optics to focus light onto the image capture medium.

15 In order to reduce assembly time and cost for high volume digital cameras, it is important that the number of circuit boards required to mount all of the components, including the image sensor and imaging optics, be kept to a minimum and that the components have as small a footprint as possible. In addition, it is important that the electronic components can be attached to the circuit boards utilizing standard automated mounting techniques, such as widely utilized surface mounting techniques.

20 It is also important in digital camera applications that the imaging optics be accurately aligned with the image sensor so that the image bearing light is focused onto the image sensor. One technique for accurately aligning the imaging optics with the image sensor involves powering up the image sensor and adjusting the location of the imaging optics in response to a detected image. Powering up the image sensor to align the imaging optics is time consuming and requires specialized alignment equipment. Other techniques for accurately aligning the image sensor with the imaging optics do not involve powering up the image sensor.

30 Various digital image capture systems having an image sensor and imaging optics that can be aligned without powering up the imaging sensor have been adapted for high volume camera production. Fig. 1 depicts a first prior art digital image

capture system which has an image sensor package 102 that is surface mounted to a circuit board 104, with the circuit board being attached to the outer case 106 of a digital camera. The imaging optics 108 are also connected to the outer case of the digital camera in a manner which allows image bearing light to contact an image sensor. The digital image capture system of Fig. 1 includes the outer case, the printed circuit board, the image sensor package, an image sensor chip 110, package leads 112, an image sensor cover glass 114, a lens holder 118, lens elements 120, a lens aperture 122, and an infra-red filter 124. Although the arrangement of image capture elements works well, accurate alignment of the lens elements with the image sensor is made difficult because of the distance between the lens elements and the image sensor and because the outer case typically has slight flexibility that can change the alignment. In addition, the outer case must be light-tight to ensure that unwanted light does not reach the image sensor.

Fig. 2 depicts a second prior art digital image capture system in which an image sensor package 202 is attached to a circuit board 204 and imaging optics 208 are attached directly to the same circuit board around the outer edges of the image sensor package. The digital image capture system of Fig. 2 includes the circuit board, the image sensor package, an image sensor chip 210, connection leads 212, an image sensor cover glass 214, a light shield 226, an infra-red filter 224, a filter retaining ring 228, a lens attachment structure 230, lens attachment screws 232, a lens holder 218, lens elements 220, and a lens aperture 222. Although the arrangement of image capture elements works well, the circuit board must be designed and built with precisely aligned attachment holes for attaching the imaging optics. Even with precisely aligned attachment holes for the imaging optics, the image sensor package must be mounted on the circuit board with precise accuracy in order to ensure alignment between the imaging optics and the image sensor. In addition, the attachment structure of the imaging optics extends beyond the outer edges of the image sensor package, thereby taking up valuable circuit board real estate.

Fig. 3 depicts a third prior art digital image capture system in which an alignment plate 334 is utilized to ensure alignment between an image sensor package 302 and imaging optics 308. The digital image capture system includes a circuit board 304, the alignment plate, the image sensor package, an image sensor chip 310,

connection leads 312, an image sensor cover glass 314, a light shield 326, an infra-red filter 324, a filter retaining ring 328, a lens attachment structure 330, connection nuts 340 and bolts 342, a lens holder 318, lens elements 320, and a lens aperture 322. The alignment plate is located between the circuit board and the image sensor package and the imaging optics. The alignment plate includes through holes that enable the connection leads of the image sensor package to connect to the circuit board. The alignment plate also includes through holes for aligning and attaching the lens attachment structure to the circuit board. Because the image sensor package and the lens attachment structure are aligned with the alignment plate, the image sensor chip and the imaging optics are indirectly aligned with each other. Although the arrangement of image capture elements works well to improve the alignment problem described with reference to the image capture system of Fig. 2, the alignment plate is not compatible with surface mounting techniques that are utilized to attach image sensing packages in high volume assembly processes. In addition, the alignment plate adds extra cost to the image capture system.

In all of the above-described digital image capture systems, the image sensor is sealed within a package cavity by a cover glass. The cover glass protects the image sensor from damage while the image sensor package is soldered to the circuit board. Other techniques for attaching and aligning imaging optics with an image sensor involve attaching the imaging optics directly to a surface of the image sensor. While this provides some advantages, the imaging optics must be attached to the image sensor in a clean-room environment because the image sensor is very sensitive to environmental contaminants. Because the imaging optics must be attached to the image sensor in a clean-room environment, the imaging optics are typically attached to the image sensor before the image sensor is soldered to a circuit board. In order to minimize the exposure of the image sensor and the imaging optics to the high temperatures required for surface mounting techniques, some image sensor packages and imaging optics are through hole mounted to the circuit boards and soldered from the back, often by labor intensive hand soldering.

The description of prior art image capture systems is not meant to be exhaustive although it does highlight some of the problems involved with assembling image capture systems, such as high volume digital cameras, that utilize image sensor

chips and imaging optics. In view of the problems involved with assembling image capture systems, what is needed is an economic technique for assembling an image capture system that ensures precise alignment between the image sensor and the imaging optics without having to power up the image sensor, without exposing the image sensor to contaminants, and without exposing the imaging optics to the high temperatures of the surface mounting process.

SUMMARY OF THE INVENTION

10

An embodiment of a digital image capture system includes an image sensor, a package structure for holding the image sensor, and electrical connectors for creating electrical connections between the image sensor and a circuit board. The package structure includes attachment features that enable the optics system to be securely attached to the package structure after the package structure has been soldered to the circuit board. The optics system can be attached directly to the package structure after the surface mounting process is complete to create a light-tight connection between the package structure and the optics system. In addition, the attachment features can align the optics system with the image sensor without having to power up the image sensor.

20

An embodiment of the attachment features includes mechanical attachment features, such as clip arms and/or clip receivers. In an embodiment, the image sensor is sealed within a cavity of the package structure by a transparent cover.

The package structure may additionally include a contact surface that is complementary to a contact surface of the optics system and alignment features, separate from the attachment features, that allow the optics system to be aligned with the image sensor.

25

Another embodiment of a digital image capture system includes an image sensor package and an optics system connected to the image sensor package. The image sensor package includes an image sensor, a package structure for holding the image sensor, and electrical connectors for creating electrical connection between the image sensor and a circuit board. The package structure includes attachment

30

features for attaching the optics system to the image sensor. The optics system includes a lens and a lens holder structure for holding the lens. The lens holder structure includes attachment features for attaching the optics system to the image sensor.

5 Another embodiment of a digital image capture system includes a circuit board, an image sensor package connected to the circuit board, and an optics system connected to the image sensor package. The circuit board includes electrical contact points. The image sensor package includes an image sensor, a package structure for holding the image sensor, and electrical connectors that are attached to
10 the electrical contact points of the circuit board to create electrical connections between the image sensor and the circuit board. The package structure includes attachment features for attaching the optics system to the image sensor. The optics system includes a lens and a lens holder structure for holding the lens. The lens holder structure includes attachment features for attaching the optics system to the
15 image sensor.

An advantage of the above described digital image capture systems is that an image sensor package can be soldered to a circuit board using conventional surface mounting techniques before the optics system is attached to the image sensor package. The optics system can then simply be “clipped” onto the image sensor
20 package into a position that automatically aligns the optics system with the image sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 is an example depiction of a prior art digital image capture system in which a circuit board and imaging optics are attached to the outer case of a digital camera.

Fig. 2 is an example depiction of a prior art digital image capture system in which imaging optics are attached to the same circuit board as an image sensor package.
30

Fig. 3 is an example depiction of a prior art digital image capture system in which an alignment plate is utilized to ensure alignment between an image sensor package and imaging optics.

Fig. 4A is a depiction of an image capture system in which imaging optics are directly connected to a surface mounted image sensor package in accordance with an embodiment of the invention.

Fig. 4B is an expanded depiction of contact surfaces, alignment features, and attachment features of the package structure and optics system shown in Fig. 4A.

Fig. 4C is a top view of the package structure of Fig. 4A that shows the alignment/attachment features.

DETAILED DESCRIPTION

Fig. 4A is a depiction of an image capture system in which imaging optics are directly connected to a surface mounted image sensor package. The image capture system includes a circuit board 404, an image sensor package 416, and an optics system 408. Each of the elements and respective sub-elements are described in detail below.

The circuit board 404 includes a conventional circuit board that is utilized in image capture applications such as hand-held digital cameras. In an embodiment, electronic components, such as image sensor packages, are connected to electrical contact points 450 on the circuit board utilizing known surface mounting techniques. In a preferred embodiment, the electronic components are attached with automated soldering processes that subject the circuit board and components to temperatures that are too high for many plastic optical lens components.

The image sensor package 416 includes a package structure 402, an image sensor 410, connection leads 412, and a transparent cover 414. The image sensor, the connection leads, and the transparent cover include elements that are known in the field of digital image capture systems. In an embodiment, the transparent cover includes a protective barrier that protects the transparent cover from damage during assembly. The protective barrier is removed before the optics system 408 is attached.

As is described below, the protective barrier may be attached to the package structure via the same attachment features that are utilized to attach the optics system to the image sensor package.

The package structure 402 houses the image sensor 410 and supports the connection leads 412 that electrically connect the image sensor to the circuit board 404. The package structure prevents unwanted light from reaching the image sensor and allows image bearing light to reach the image sensor only through the transparent cover 414. The package structure may be made of known packaging materials such as plastic or ceramic.

The package structure 402 is designed to create a connection between the package structure and the optics system 408 that is light-tight and that accurately aligns the optics system with the image sensor 410. In order to create a connection that is light-tight and that accurately aligns the optics system with the image sensor the package structure includes a contact surface 452, or surfaces, and attachment features. The package structure may also include alignment features that help to accurately align the optics system with the package structure. As will become apparent, some portions of the package structure may serve multiple roles, such as part contact surface(s) and part alignment feature, or part attachment feature and part attachment feature.

The contact surface 452 of the package structure 402 is a surface that is formed to create a light-tight connection between the package structure and the optics system 408. Referring to Fig. 4B, in an embodiment, the contact surface includes a continuous surface around the package structure that is complimentary to a contact surface 458 of the optics system. That is, the contact surface of the package structure fits directly against an opposite contact surface of the optics system. In an embodiment, the contact surface, or surfaces, of the package structure may include seals or irregularities, such as dark color baffles, that ensure a light-tight and secure connection between the image sensor package 416 and the optics system. Baffles may be used to ensure that leaking light is reflected one or more times and a dark color is used to ensure that light is absorbed and not reflected.

The attachment features are features of the package structure 402 that enable the optics system 408 to be securely attached to the image sensor package 416.

In an embodiment, the attachment features may include exterior and/or interior features such as clips and/or clip receivers. As shown in Figs. 4A – 4C, the package structure includes clip receivers 454 and 456 on the exterior of the package structure that are formed to fit clip arms 460 of the optics system. It should be noted that
 5 although specific attachment features are shown in Figs. 4A – 4C, other arrangements of attachment features may be utilized to attach the optics system to the image sensor package. In an embodiment, the attachment features of the package structure may be separate from alignment features. Although the above-described contact surface helps to create a light-tight connection between the package structure and the optics
 10 system, a package structure having attachment features and no control surface is possible.

The alignment features of the package structure are features that cause the optics system to be accurately aligned with the image sensor once the optics system is attached to the package structure. In an embodiment, the alignment features may
 15 include mechanical alignment features and/or optical alignment features. Example mechanical alignment features include notches, grooves, flat surfaces, protrusions, etc. that are complementary to mechanical alignment features of the optics system. Example optical alignment features may include optically detectable markings or notches that are optically aligned with complementary features on the optics system.
 20 Fig. 4C is a top view of the package structure of Fig. 4A in which alignment features 454 of the package structure include four notches in the package structure that form clip receivers. The clip receivers are aligned to receive clip arms of the optics system. The clip receivers and clip arms are integrated into the package structure and the optics system such that alignment of the clip receivers and clip arms causes alignment
 25 of the imaging optics with the image sensor. In the embodiment of Figs 4A – 4C, the alignment features also serve as the attachment features. That is, the clip arms and clip receivers cause the optics system to be attached to the package structure as well as aligned with the package structure and the image sensor.

The optics system 408 includes a lens holder structure 418, imaging optics
 30 420, and a lens aperture 422. The imaging optics may include one or more lenses as is known in the field of digital image capture. The lens, or lenses, may be made of, for example, plastic or glass and are shaped to direct and focus the desired image

bearing light onto the image sensor 410. In an embodiment, the imaging optics and aperture can be adjusted to change parameters such as the field of view, focus, image magnification, and light intensity. In an embodiment, the imaging optics include changeable lens sub-assemblies.

5 The lens holder structure 418 houses the imaging optics and is connected directly to the image sensor package. The lens holder structure may be made of plastic, metal, or some other material or any combination thereof, as is known in the field of optics systems.

10 The lens holder structure 418 is designed to create a connection between the lens holder structure and the package structure 402 that is light-tight and that accurately aligns the imaging optics 420 with the image sensor 410. In order to create a connection that is light-tight and that accurately aligns the imaging optics with the image sensor, the lens holder structure includes the contact surface 458, or surfaces, and attachment features 460 that are complementary to the above-described contact
15 surface(s) and attachment features of the package structure. The lens holder structure may also include alignment features that help to accurately align the lens holder structure to the package structure. Some portions of the lens holder structure may serve multiple roles, such as part contact surface and part attachment feature, or part alignment feature and part attachment feature.

20 The contact surface, or surfaces, 458 of the lens holder structure 418 is a surface that is formed to create a light-tight connection between the package structure 402 and the optics system 408. In an embodiment, the contact surface of the lens holder structure includes a continuous surface around an inner portion of the lens holder structure that is complimentary to the contact surface 452 of the package
25 structure. That is, the contact surface of the lens holder structure fits directly against the contact surface of the package structure. In an embodiment, the contact surface of the lens holder structure may include seals or irregularities, such as dark colored baffles, that ensure a light-tight and secure connection between the image sensor package and the optics system.

30 The attachment features of the lens holder structure are features that enable the optics system 408 to be securely attached to the image sensor package 416. In an embodiment, the attachment features may include exterior and/or interior features

such as clip arms and/or clip receivers that are complementary to the attachment features of the package structure 402. In the embodiment of Figs. 4A – 4C, the lens holder structure 418 includes clip arms 460 on the exterior of the lens holder structure that are formed to mate with the clip receivers 456 of the package structure. It should be noted that although specific attachment features are shown in Figs. 4A – 4C, other arrangements of attachment features may be utilized to attach the optics system to the image sensor package. For example, the package structure 402 may have clip arms and the lens holder may have complementary clip receivers. In an embodiment, the attachment features of the lens holder structure may be separate from the alignment features.

In addition to the complementary attachment features of the package structure 402 and the lens holder structure 418, the optics system may be more securely attached to the package structure by, for example, gluing or welding, after the optics system is initially attached to the package structure by the complementary attachment features. In an embodiment, the complementary attachment features of the package structure and lens holder structure serve to hold the optics system and the package structure together while they are permanently affixed by gluing or welding. For example, clip arms and clip receivers may initially attach the optics system to the package structure while glue is applied and cured, thus ensuring that the glue does not change the alignment of the optics system to the image sensor. In an embodiment, the attachment features may be temporary, or removable, features that are eliminated after the optics system is permanently affixed to the package structure.

The alignment features of the lens holder structure 418 are features that cause the optics system 408 to be accurately aligned with the image sensor 410 once the optics system is attached to the package structure 402. In an embodiment, the alignment features may include mechanical alignment features and/or optical alignment features. Example mechanical alignment features include notches, grooves, flat surfaces, protrusions, etc. that are complementary to mechanical alignment features of the package structure. Example optical alignment features may include optically detectable markings or notches that are optically aligned with complementary features on the package structure. In the embodiment of Figs. 4A – 4C, alignment features of the lens holder structure include clip arms 460 that are

aligned to fit into the clip receivers 454 of the package structure. As described above, matching the clip arms to the clip receivers causes the imaging optics to be aligned with the image sensor. In the embodiment of Figs. 4A – 4C, the alignment features also serve as attachment features. That is, the clip arms of the lens holder structure
5 help cause the optics system to be aligned and attached to the package structure.

Because of the high temperatures required for surface mounting components to circuit boards, in an embodiment, the image sensor package 416 is soldered to the circuit board 404 without the optics system 408. In an embodiment, the transparent cover 414 over the image sensor 410 is protected during surface mounting by a
10 temporary protective barrier. The temporary protective barrier, which may be attached to the package structure by the package structure attachment features, is removed from the transparent cover before the optics system is attached to the package structure.

The optics system is attached to the image sensor package after the image
15 sensor package has been soldered to the circuit board, thus preventing the imaging optics 420 from being subjected to potentially damaging high temperatures. In the embodiment of Figs. 4A – 4C, the optics system is clipped directly to the package structure after the image sensor package has been surface mounted to the circuit board. The clip arms 460 of the lens holder structure 418 and the clip receivers 456 of
20 the package structure 402 cause the image sensor 410 to be accurately aligned with imaging optics when the clip arms are fit into the clip receivers. Because the optics system is connected directly to the image sensor package, the optics system does not expand the footprint of the image sensor package.

In an embodiment of the image capture system, the package structure includes
25 at least three alignment features that are complementary to at least three alignment features of the lens holder structure. In an embodiment of the image capture system, the package structure includes at least one attachment feature that is complementary to at least one attachment feature of the lens holder structure.

Preferably, the image sensor package and optics system are assembled
30 utilizing materials and processes that exclude dust and moisture from damaging the image sensor and the imaging optics.

In an embodiment, the image sensor package and optics system are assembled to eliminate air gaps between the internal elements of the image sensor package or between the rear lens element of the optics system and the transparent cover of the image sensor package. In an embodiment, an index matching fluid is placed between
5 the rear lens element of the optics system and the transparent cover of the image sensor package to prevent reflections or other image aberrations.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2

WHAT IS CLAIMED IS:

1. A digital image capture system comprising:
an image sensor;
5 a package structure for holding said image sensor, said package structure including attachment means for attaching an optics system to said package structure; and
electrical connectors for creating electrical connections between said image sensor and a circuit board.
10
2. The digital image capture system of claim 1 wherein said attachment means includes an irregular surface on said package structure for mechanically attaching said optics system to said package structure.
- 15 3. The digital image capture system of claim 1 wherein said attachment means includes a recess on said package structure for mechanically attaching said optics system to said package structure.
4. The digital image capture system of claim 1 wherein said attachment means includes a clip receiver integrated with said package structure for
20 mechanically attaching said optics system to said package structure.
5. The digital image capture system of claim 1 wherein said attachment means includes a clip arm integrated with said package structure for mechanically
25 attaching said optics system to said package structure.
6. The digital image capture system of claim 1 wherein said package structure includes a contact surface that is complementary to a contact surface of said optics system.
30

7. The digital image capture system of claim 6 wherein said contact surface of said package structure is formed to create a light-tight connection with said contact surface of said optics system.
- 5 8. The digital image capture system of claim 1 further including a transparent cover connected to said package structure that encloses said image sensor within a cavity of the package structure.
9. The digital image capture system of claim 8 further including a removable protective barrier, connected to said attachment means, that protects said
10 transparent cover from damage.
10. The digital image capture system of claim 1 wherein said attachment means causes said optics system to be aligned with said package structure and said image sensor when said optics system is attached to said package structure.
15
11. The digital image capture system of claim 1 further including an alignment feature integrated into said package structure for aligning said optics system with said image sensor.
20

12. A digital image capture system comprising:
an image sensor package; and
an optics system connected to said image sensor package;
said image sensor package comprising;
5 an image sensor;
a package structure for holding said image
sensor, said package structure including
attachment means for attaching said optics
system to said image sensor package;
10 electrical connectors for creating electrical connections
between said image sensor and a circuit board;
said optics system comprising;
a lens;
a lens holder structure for holding said lens, said
15 lens holder structure including
attachment means for attaching said optics
system to said image sensor package.
13. The digital image capture system of claim 12 wherein said attachment means
20 of said package structure and said attachment means of said lens holder
structure include complementary surfaces for mechanically attaching said
optics system to said image sensor package.
14. The digital image capture system of claim 12 wherein said image sensor
25 package includes a transparent cover connected to said package structure that
encloses said image sensor within a cavity of said package structure.
15. The digital image capture system of claim 12 wherein said attachment means
30 of said package structure and said lens holder structure cause said lens to be
aligned with said image sensor.

16. The digital image capture system of claim 12 wherein said attachment means of said package structure includes clip receivers and wherein said attachment means of said lens holder structure includes clip arms, said clip arms and said clip receivers being mutually attachable to create a connection between said package structure and said lens holder structure.
17. The digital image capture system of claim 12 wherein said attachment means of said package structure includes clip arms and wherein said attachment means of said lens holder structure includes clip receivers, said clip arms and said clip receivers being mutually attachable to create a connection between said package structure and said lens holder structure.
18. The digital image capture system of claim 12 wherein said package structure and said lens holder structure include complementary contact surfaces.

19. A digital image capture system comprising:

a circuit board;

an image sensor package connected to said circuit board; and

an optics system connected to said image sensor package;

5 said circuit board having electrical contact points;

 said image sensor package comprising;

 an image sensor;

 a package structure for holding said image
 sensor, said package structure including

10 attachment means for attaching said optics
 system to said image sensor package;

 electrical connectors that are attached to said electrical
 contact points of said circuit board, said electrical connectors
 creating electrical connections between said image sensor and
15 said contact points of said circuit board;

 said optics system comprising;

 a lens;

 a lens holder structure for holding said lens, said lens
 holder structure including attachment means for attaching said
20 optics system to said image sensor package.

20. The digital image capture system of claim 19 wherein said attachment means
of said package structure and said attachment means of said lens holder
structure include complementary surfaces for mechanically attaching said
25 optics system to said image sensor package.

21. The digital image capture system of claim 19 wherein said image sensor
package includes a transparent cover connected to said package structure that
encloses said image sensor within a cavity of said package structure.

30

22. The digital image capture system of claim 19 wherein said attachment means of said package structure includes clip receivers and wherein said attachment means of said lens holder structure includes clip arms, said clip arms and said clip receivers being mutually attachable to create a connection between said package structure and said lens holder structure.

23. The digital image capture system of claim 19 wherein said attachment means of said package structure includes clip arms and wherein said attachment means of said lens holder structure includes clip receivers, said clip arms and said clip receivers being mutually attachable to create a connection between said package structure and said lens holder structure.

ABSTRACT

A digital image capture system includes an image sensor, a package structure for
 holding the image sensor, and electrical connectors for creating electrical connections
 5 between the image sensor and a circuit board. The package structure includes
 attachment features that enable an optics system to be securely attached to the
 package structure after the package structure has been soldered to the circuit board. In
 an embodiment, the attachment features align the optics system with the image sensor
 without having to power up the image sensor. An embodiment of the attachment
 10 features includes mechanical attachment features, such as clip arms and/or clip
 receivers. In an embodiment, the optics system includes attachment features that are
 complementary to the attachment features of the package structure. The package
 structure and optics system may additionally include complementary contact surfaces
 that create a light-tight connection between the optics system and the package
 15 structure.

097594-44600
 097594-44600

FIG. 1
(PRIOR ART)

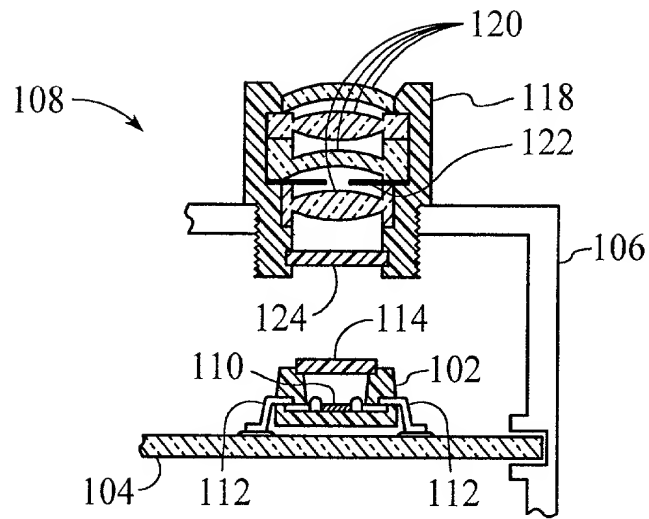


FIG. 2
(PRIOR ART)

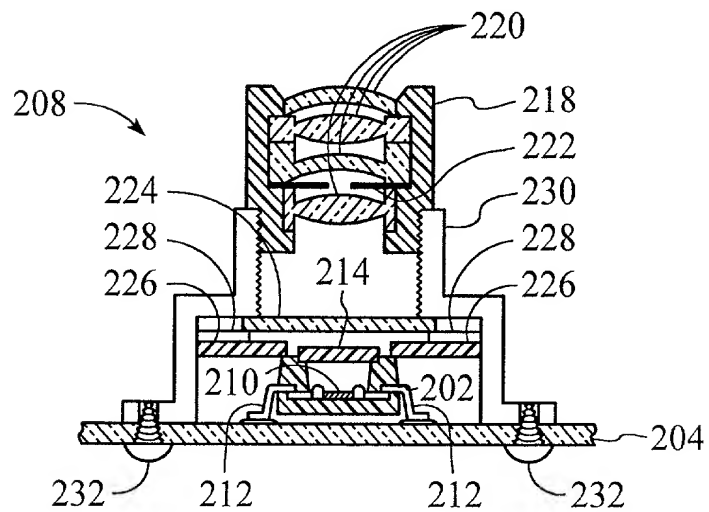


FIG. 3
(PRIOR ART)

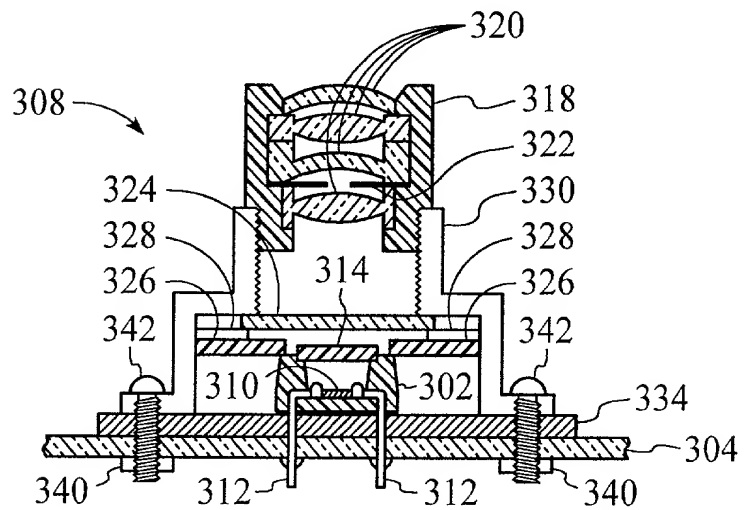


FIG. 4A

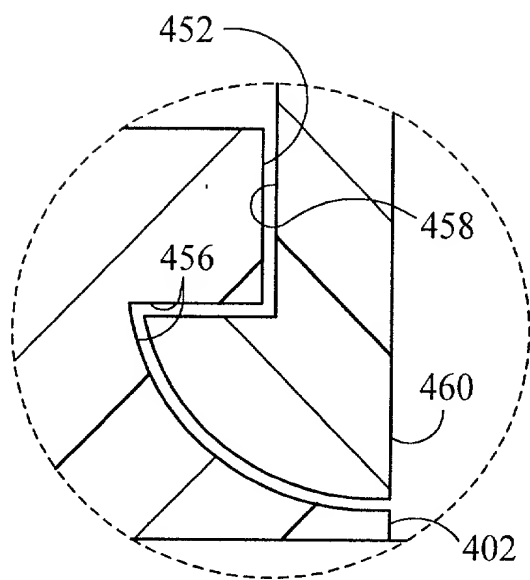
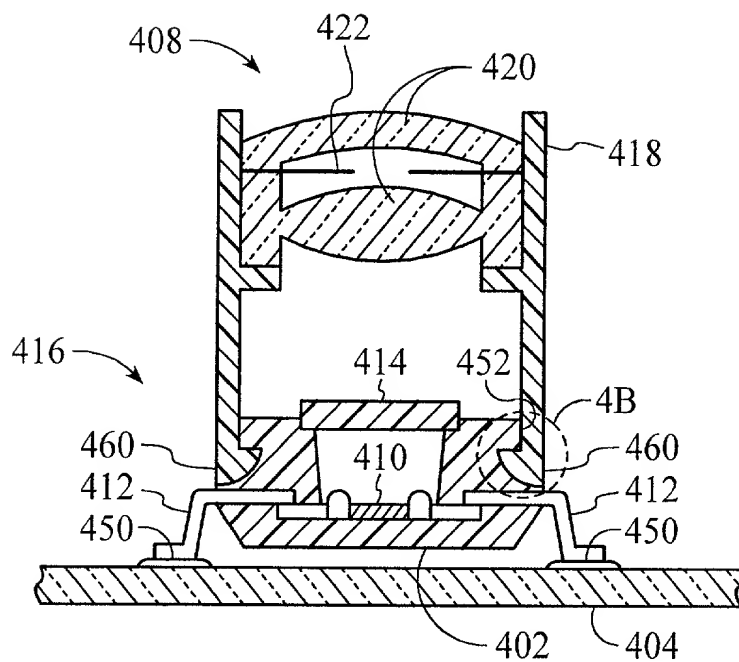


FIG. 4B

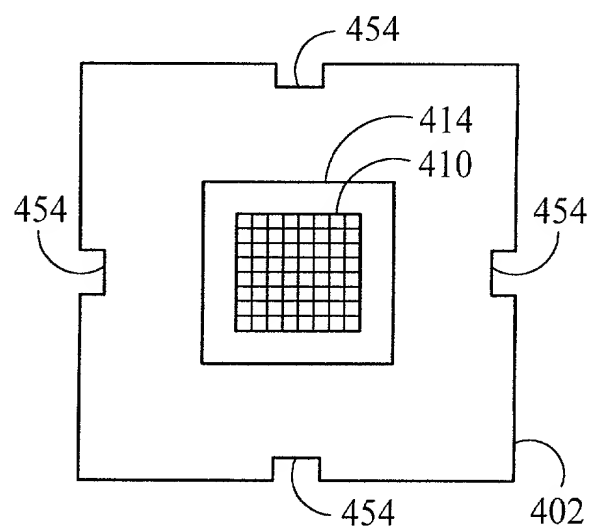


FIG. 4C

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**ATTORNEY DOCKET NO. 10990361-2

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Image Sensor Packaging with Imaging Optics

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022878**Place Customer
Number Bar Code
Label here

Send Correspondence to:
AGILENT TECHNOLOGIES
 Legal Department, 51U-PD
 Intellectual Property Administration
 P.O. Box 58043
 Santa Clara, California 95052-8043

Direct Telephone Calls To:

Pamela Lau Kee
(408) 553-3059

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: **Andrew Hunter**Citizenship: **UK**Residence: **96 Park Road, Stapleton, Bristol BS16 1AU, England**Post Office Address: **Same**

Inventor's Signature _____

Date _____

ATTORNEY DOCKET NO. 10990361-2

Inventor's Signature _____ **Date** _____